

SEMI-AUTO

INTERCHANGEABLE BARRELS

F70
COMPLET

F49

F42

H52

P53Q

A23 STANDARD

LEFT-HAND WITH R-RECOIL FWD
SINTER STEEL PLATE COUPLER
SINTER COX CALCULUS COUPLER

14-1500 RPM

This diagram illustrates the rear suspension assembly. It shows a rear axle (A16) with a rear shock absorber (A02) mounted to it. The shock absorber is secured by a pin (A03). A spring (D03) is shown attached to the axle and a spring plate (D04). A nut (D18) is shown at the bottom left, likely for the axle nut.

A12 STANDARD

RIGHT-HAND WITH R.R. PAD
DROIT AVEC PL. DE COUCHE
DESTRO CON CALC. GOMMA



EDITION 1998

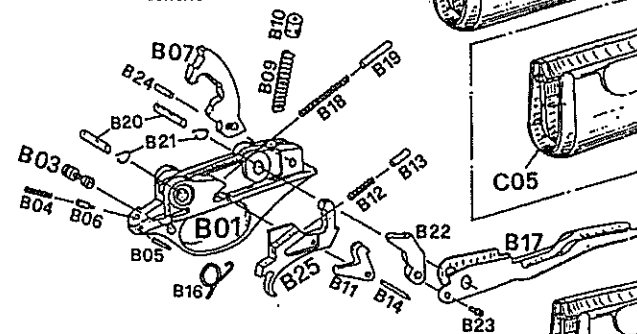


Diagram of the G42 STANDARD rifle receiver assembly. The receiver is labeled "COMPLET G42 STANDARD". The bolt is labeled "G56". The trigger mechanism is labeled "G54", "C09", and "R87".

INTERCHANGEABLE
NEW & OLD MODELS

COMPLET G30
INTERCHANGEABLE
NEW & OLD MODELS

G47
INTERCHANGEABLE
NEW & OLD MODELS

INTERCHANGEABLE
NEW & OLD MODELS

